refreshingly different

AFiRST

Over 225,000 Water Coolers and Boilers sold tells the story of our success.



COSMETAL Coolers Now Available From AA First

Cedar House Grange Farm Long Lane Newbury RG14 2TF

T: 44 (0) 1635 202489

E: enquiries@aafirst.co.uk

www.aafirst.co.uk

		Contactless & KLARAN	SIPneo3 Available	Contactless & KLARAN Available	Contactless & KLARAN Available	e SIPneo3 Available			
		Available ArcticRevolution 70	ArcticStar 55	ArcticChill 88	ArcticChill 98	3300X	AQUALITY FZ	Jazz 1000	AquaPoint 60
	AFIRST						(Sparkling Water)	lazz 1100	
								Jazz 1100	
Wate	er Coolers	-							
	25,000 water coolers				· 🛞				
sold tell	s the story of	ArcticRevolution 70B							
our suc						🗾 📲 🖉			
			∆ (Ť						
Taps: Manua	l/Solenoid/Contactless	S/CL	М	S/CL	S/CL	М	S	М	М
POU/Bottlee		POU	P/B	POU	POU	P/B	P/B	P B	В
	ng/Table Top	TT	FL/TT	FL/TT	FL	FL/TT	FL	FL	FL
Chilled/Amb		√	✓	CHILLED ONLY	√	√	✓	√	√
Chilled/Hot		-	√	-	-	√	-	√	-
Direct Chill/	Tank Fed/ICE Bank	DC	TF	DC	DC	TF	IB	TF	TF
Dispensing I	Height	21cm	16cm	23cm	23cm	14cm	25.6cm	14cm	14cm
Hygiene-Gu	ard	✓	✓	✓	✓	-	-	-	-
(Influent Water Temp 16℃)	Chilled Below 12°C Ltr/h	10 ltr/h	20 ltr/h	30 - 40 ltr/h	30 - 40 ltr/h	20 ltr/h	22 ltr/h (Bottled) 28 ltr/h (POU)	20 ltr/h	20 ltr/h
	Hot Water Hourly Capacity Ltr/h	-	9 ltr/h Above 90 C	-	-	5 lţr/h 85 C +	_	5 lţr/h 85 C +	-
	Boosted Hot Instant Draw Off	-	1.5 ltrs between 90 C & 95 C	-			_	-	-
CO ² Cooler:	600gr CO ² Cylinder	-	-	-	-	-	500 Cups	-	-
Dimensions: POU FL		-	1135H 340W 340D	1135H 340W 340D	1135H 340W 340D	1135H 340W 340D	1118H 345W 337D	1015H 340W 335D	-
	POUTT	370H 240W 488D	460H 340W 340D	460H 340W 340D	-	460H 340W 340D	-	-	-
	Bottled FL	-	1150H 340W 340D	-	-	1150H340W 340D	1118H 345W 337D	1020H 340W 335D	1032H 326W 353D
Bottled TT		-	465H 340W 340D	-	-	465H 340W 340D	-	-	-
Integrated (Panel)	Cup Dispenser (Can Be Replaced By Blanking	-	×	-	-	✓	-	-	-
ECO Sensor	: Approx 25% Power-saving	-	✓	-	-	-	-	-	-
FloodGuard	I Flood Protection	✓	-	✓	✓	-	-	-	-
	oved (Certificate No. 1702077)	-	-	√	-	✓	√	-	-
	Jpgrades & Accessories:								
SIPneo3 24/ (Floor stand	7 self sanitising system. Factory installed. ing tank fed POU or Bottled coolers only)	-	ArcticStar 55SIP	-	-	3300X SIP	-	-	-
Contactless dispensing I POU coolers	Infrared Sensor to avoid touching the button. Factory installed. (Direct chill (()) s only)	ArcticRevolution () 70CL/70BCL	-	ArcticChill 88CL 🤇 🕷 🕷 🕷 🕷	ArcticChill 98CL	-	_	-	-
KLARAN UV installed. (D	C LED Water Purification System. Factory irect chill POU coolers only)	ArcticRevolution 70KLARAN/70BKLARAN	-	ArcticChill 88 KLARAN	ArcticChill 98 KLARAN	-	-	_	-
dispensing l Purification	Infrared Sensor to avoid touching the outton & KLARAN UVC LED Water System. Both factory installed. POU coolers only)	ArcticRevolution 70CLKLARAN 70BCLKLARAN	-	ArcticChill 88CL (())	ArcticChill 98CL (())	-	-	-	-
Accessories For Coolers:		An elegantly designed Direct	A POU or Bottled cooler avail-	A high capacity Direct Chill	A high capacity Direct Chill	A tough no nonsense POU or	When installing an Ice Bank	Jazz1000/1100: Our	AquaPoint 60: Designed to
		Chill table top cooler dispensing chilled and	able as floor standing or table top. The outstanding feature	POU cooler for chilled water only. A high dispensing	POU cooler dispensing chilled and ambient water. A	Bottled cooler of legendary reliability. Manual taps. Floor	Cooler please ensure to fill the Ice Bank with water first	economy POU & Bottled cooler range. Floor standing	look like a conventional bottled cooler
 3ltr and Mains d 	10ltr overflow kits raining kit	ambient water.	is a hot water booster button which can boost the hot	area allows for bottle	high dispensing area allows	standing or table top. Can be	before turning the Cooler	only, available as chilled &	this ambient & cold, floor
Drip Tray Overflow options • 3ltr and 10ltr overflow kits • Mains draining kit • Mains draining kit with pump • Extense to the Will		Factory fitted with Flood- Guard to prevent large	water temperature to 95 C. Concealed manual taps are	filling. Factory fitted with FloodGuard to prevent large	for bottle filling. Factory fitted with FloodGuard to	fitted with SIP self-sanitising system to reduce sanitising	on. Without that, the Chilling unit will burn out.	ambient or chilled & hot.	standing model is the first of a new family of economy
Fixings to the Wall Cowling to secure floor standing Coolers to the wall Wall Bracket to secure Coolers to the wall		scale flooding. Can be fitted with infra-red contactless	tamper resistant. An inbuild ECO sensor stops the	scale flooding. Can be fitted with infra-red contactless	prevent large scale flooding. Can be fitted with infra-red	call outs.			coolers.
Conversion	Kit from Bottlad to POU	dispensing and the KLARAN	boiler from boiling "when the office lights go out". The floor standing cooler can be fitted with SIP self-sanitising system	dispensing and the KLARAN	contactless dispensing and				
Conversion Kit from Bottled to POU Automatic 24/7 Sanitising and Water Purification Systems		UVC LED water purification system.	standing cooler can be fitted with SIP self-sanitising system	UVC LED water purification system.	the KLARAN UVC LED water purification system.				
	can be added to all floor standing Tank Fed		to reduce sanitising call outs.	-					
 SIFneos can be added to all floor standing lank Fed Coolers KLARAN UVC LED Shield can be added to all Direct Chill floor standing and table top coolers 									
Chill floo	or standing and table top coolers								



AAFIRST		Contactless		Contactless		Contactless	Contactless		Contactless
/ W NFIRSI	Fountain WFT6	Hands-Free Fountain WFP9T	Under-sink Chiller UC800MC with Manual Swan Neck Tap	Undersink Chiller UC800MCL with Contactless Swan Neck Tap	FONT10 Wall Mounted Fountain with Bubbler	Drinking Fountain FONT10BCL with Contactless Bubbler	FONT10CL Wall Mounted Fountain with Contactless Swan Neck Tap	Drinking Fountain With Bottle Filler FONT30	Drinking Fountain With Contactless Bottle Filler & Contactless Bubbler FONT30CL
Water Fountains & Under-Sink Chillers Over 225,000 water coolers sold tells the story of our success									
Mains Connected	✓	✓	✓	~	~	~	√	✓	✓
Mains Drainage	✓	√	✓	√	√	✓	✓	√	✓
Indoor & Covered Outdoor Installation	Indoor Only	Indoor Only	Indoor Only	Indoor Only	Suitable For Covered Outdoor	Suitable For Covered Outdoor	Suitable For Covered Outdoor	Suitable For Covered Outdoor	Suitable For Covered Outdoor
Manual Tap/Hands Free/Contact-less Tap	MAN	HF	MAN	CL	MAN	CL	CL	MAN	MAN
Floor Standing/Wall Mounted/Under-sink	FS	FS	US	US	WM	WM	WM	WM	WM
Dispensing Height For Bottles	21cm	21cm	20cm	23cm	N/A	N/A	23cm	35cm	35cm
Drinking Bubbler	√	-	-	-	√	V	-	√	✓
Ambient Water	-	-	-	-	✓	V	V	✓	✓
Chilled Water	26 ltr/h	26 ltr/h	11.5 ltr/h	11.5 ltr/h	Add UC800 for Chilled Water	Add UC800 for Chilled Water	Add UC800 for Chilled Water	Add UC800 for Chilled Water	Add UC800 for Chilled Water
Dimensions (mm)	1015H X 305W X 305D	1015H X 305W X 305D (PEDAL + 65D)	300H X 410W X 300D	300H X 410W X 300D (TAP + 300H)	220H X 310W X 345D	220H X 310W X 345D	220H X 310W X 345D (TAP + 300H)	750H X 330W X 370D	750H X 330W X 370D
Description	Durable fountain with push button swan neck and bubbler. 26ltr/h capacity below 10 [°] C from in-fluent water temperature of 20 [°] C	Hands-free, foot pedal controlled fountain with tamper resistant swan neck which is screwed to the drip tray. Without bubbler to avoid bacterial contamination. The same high spec as the WFT6	The UC800MC undersink chiller has an attractive chrome manual swan neck tap	UC800MCL Undersink chiller with a contactless swan neck tap. The swan neck tap has an infra-red sensor which activates the dispensing through hand movement	The FONT10 has a Bubbler to dispense water. Robustly built and easy to install, the FONT meets the growing need of dispensed drinking stations indoors or in covered outdoor areas	The FONT10BCL drinking fountain has an infra-red sensor which allows for contactless dispensing to avoid hand to Bubbler contact contamination. Robustly built and easy to install, the FONT meets the growing need of dispensed drinking stations indoors or in covered outdoor areas	This contactless wall mounted fountain combines our FONT10 with a contactless swan neck tap. The infra-red sensor of the tap activates dispensing water through hand movement	The FONT30 Wall mounted drinking fountain with bubbler and bottle filler. Robust build and easy to install it meets the growing need of dispensed drinking stations indoors and in covered open spaces	nund movement in none
Accessories									
Plumbing & Filter Kits	1	*	V	V	\checkmark	V	✓	✓	✓
Cowling to secure WFT6 and WFP9T to the wall	✓	✓	-	-	-	-	-	-	-

AAF	RST	1200L	Power Smart 3	EZYTAP75/ EZYTAP75T	EZYTAP7800/ EZYTAP7800T	1000C	1500	WA5	1000TF
	Boilers u Grow Your								
Contactless: No	Touch or No Touch Adapter	-	-	-	-	NTA	NTA	NTA	NT 📢
	Boiler/Boiler & Chiller	В	В	В	B&C	В	В	В	В
	Instant Draw Off	8 Ltr	6Ltr	3.5 lLtrHot + Unchilled	3.5 LtrHot 2 Ltr Chilled	5 Ltr	11 Ltr	5 Ltr	10 Ltr
	Capacity ltr/h	17 Ltr/Hr	17 Ltr/Hr	14 Ltr/Hr + Ambient	14 Ltr/Hr+ 11.5 Ltr/Hr Chilled	31 Ltr/Hr	31 Ltr/Hr	31 Ltr/Hr	31 Ltr/Hr
AAFirst	Hot Only Hot & Ambient Hot & Chilled	Hot Only	Hot Only	Hot & Unchilled	Hot & Chilled	Hot Only	Hot Only	Hot Only	Hot Only
	Dispensing Height	16.5cm	16.5cm	18.5cm (EZYTAP75) 24cm (EZYTAP75T)	18.5cm (EZYTAP7800) 24cm (EZYTAP7800T)	16.5cm	15cm	-	13.5cm
	Dimensions	560H 260W 260D	436H 215W 345D	329H 220W 352D	Boiler 329H 220W 352D Chiller 300H X 410W X 300D	440H 216W 345D	590H 240W 340D	438H 290W 207D	545H 240W 522D
	Table Top/Floor Standing Wallmount Tap & Undersink	Table Top	Table Top	Tap & Undersink Boiler	Tap & Undersink Boiler Plus Chiller	Table Top	Table Top	Wallmount	Table Top
CAUTON	ECO Sensor	-	1	-	-	-	-	-	-
	On demand / timed dispense with top up dispense feature	-	_	-	_	_	-	_	✓
	Safety light in cup recess avoids accidental dispense	-	-	-	-	-	-	-	✓
		Economy boiler - sturdy and reliable	Low height with 24/7 timer to turn the boiler off. Can save you up to £40 p.a. in electricity and 175kg in carbon production	The electronic EZYTAP75/75T provides hot and ambient water and is connected to an undersink boiler. The EZYTAP75T has an extra tall dispensing height of 24cm for bottle filling	The electronic EZYTAP7800/7800T provides hot and chilled water and is connected to an undersink boiler and the UC800M undersink chiller. The EZYTAP7800T has an extra tall dispensing height of 24cm for bottle filling	Counter top boiler for tight spaces. WRAS Approved.	Top of the range high capacity table top boiler. WRAS Approved.	Wall mounted boiler. WRAS Approved.	High capacity contactless dispensing boiler with on demand or timed dispense a top up dispense feature. WRAS Approved.

refreshingly different


Next Day Delivery Technical and Marketing Support Friendly and Personal Service

www.aafirst.co.uk

COSMETAL From AA First



Water Coolers & Under-Sink Units

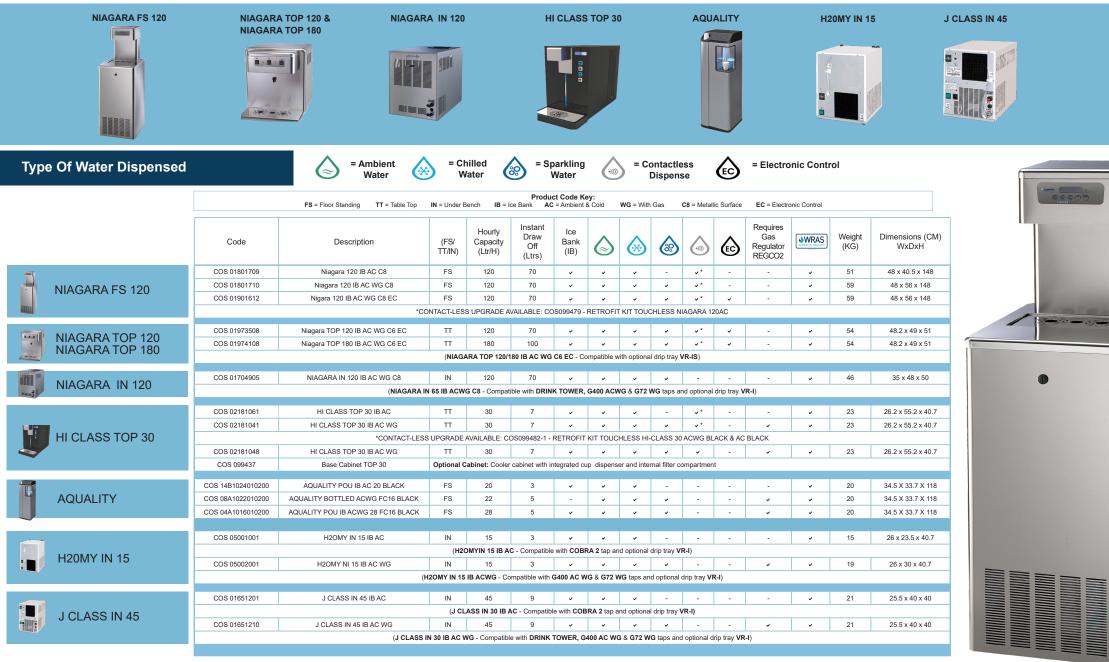

COSMETAL From AA First

APPROVED PRODUCT

Taps & Drip Trays

DRINK TOWER		COBRA 2 G400 ACWG		G72 W	G72 WG			Drip Tray VR-I			Drip Tray VR-IS	
									2			
CODE	Name		Description			NIAGARA IN		H20MY IN		SS IN	DRIP TRAY VR-I	
					AC	ACWG	AC	ACWG	AC	ACWG		
COS 099262	DRINK TOWER V19 EC AC WG	Electronically contro	Electronically controlled tap for ambient and chilled, or chilled and CO2 carbonated water			~	~	~	~	~	~	
COS 099423	Cobra 2		A 2 way Chrome-Plated Manual Tap		~	~	~	~	~	~	~	
COS 099430	G400 ACWG	Elec	Electronic Tap for Ambient, Chilled and CO2 Carbonation		-	~	-	~	-	~	~	
COS 099149	G72 WG		Manual Two Way Tap for Chilled and CO2 Water		-	~	-	~	-	~	~	
COS 090024	Driptray VR-I		Dimensions (CM) 40.5W x 22.5D x 2.8H		~	~	~	~	~	~		
COS 099113	COS 099113 Driptray VR-IS Dimensions (CM) 40.8W x 18.9D x 3.2H			Compatible Drip Tray For The Niagara TOP 120 IB AC WG C8 EC (Inox Hook On Drip Tray)								

Installation Rail & Filter (To connect Cosmetal Water Coolers & Under-sink Units to a mains water supply)

	Code	Description	APPROVED PRODUCT
4	PFRAILKITCOS	Installation Rail with high capacity replacement Filter Candle and re-usable Filter Housing. Includes Compression Fittings, Non-Return Valve, Water Block and Pressure Reducing Valve.	~
	FILTBCM	High capacity Carbon Fibre dyne replacement Filter Candle with Siliphos 20,000 litre capacity	~